


RF Series

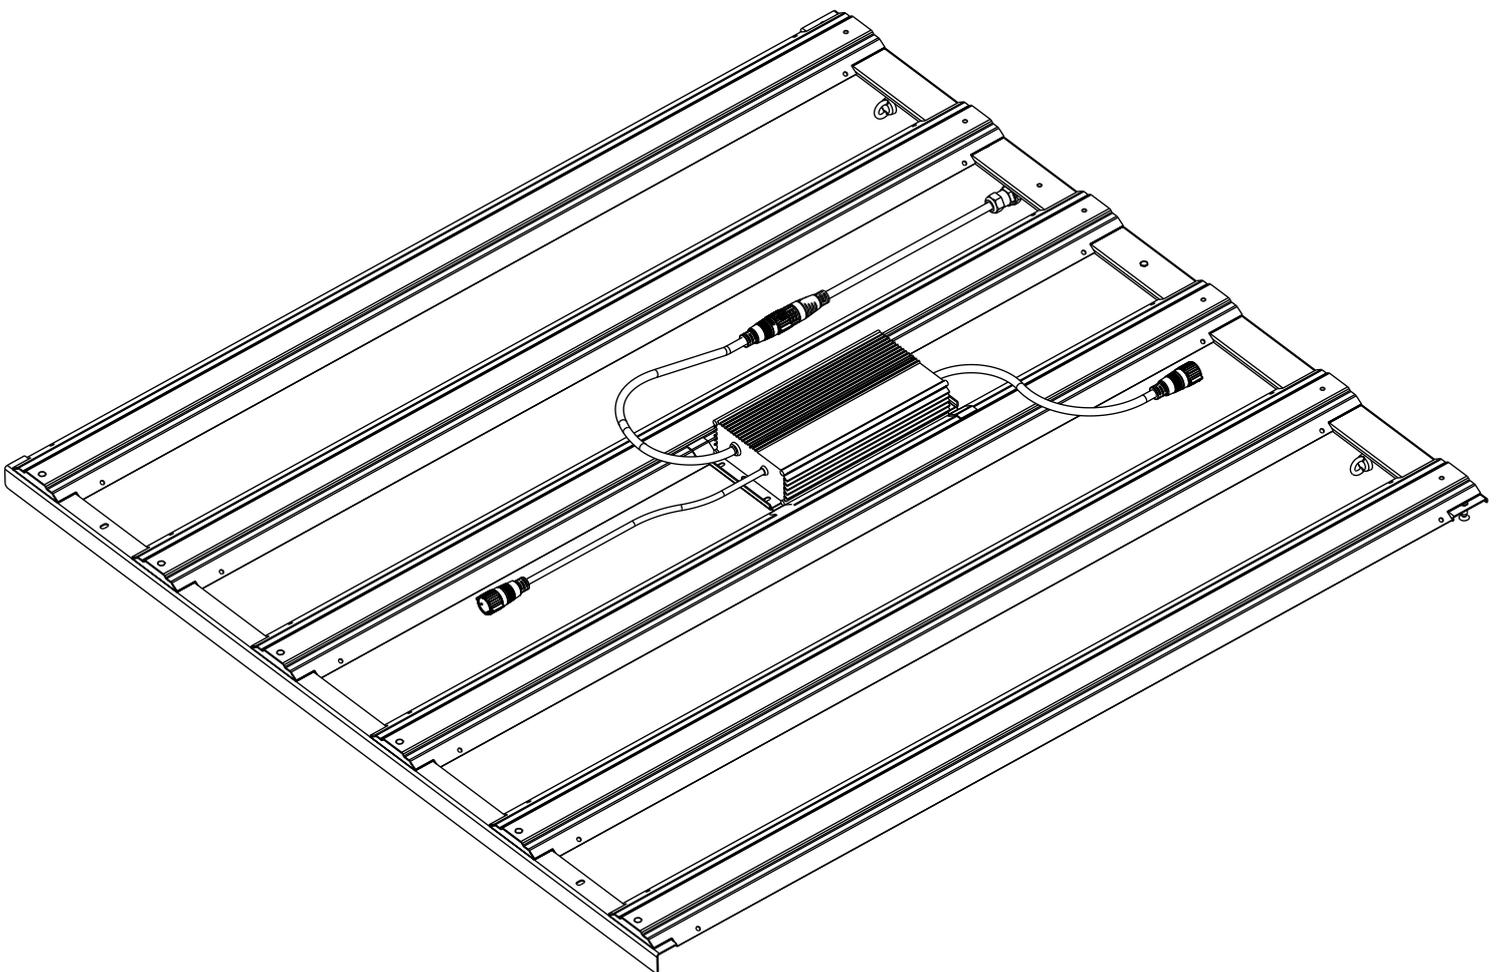

ENGLISH**CAUTION!**

Inappropriate installation may cause injury to persons and damage to the lamp.

DEUTSCH**VORSICHT!**

UnsachgemäÙe Installation kann zu Personen- und Sachschäden führen.

NEDERLANDS**LET OP!**

Onjuiste installatie kan schade aan personen of de lamp veroorzaken.

PORTUGUÊS**ATENÇÃO!**

A instalaçãoo inapropriada pode causar danos na luminária e ferimentos nas pessoas.

ESPAÑOL**PELIGRO!**

Una instalación inadecuada puede provocar lesiones o dañar la lámpara.

VLAAMS**LET OP!**

Verkeerde aansluiting kan schade veroorzaken aan de lamp of leiden tot lichamelijk letsel aan personen

FRANÇAIS**ATTENTION!**

Une mauvaise installation peut être source de blessures corporelles et endommager les lampes.

SVENSKA**AKTA!**

Felaktig installation kan leda till skador p person-er och lampan.

SUOMI**HUOMIO!**

Valaisimen huolimaton asennus voi johtaa henkilön loukkaantumiseen ja valaisimen vioittumiseen.

**РУССКИЙ
ОСТОРОЖНО!**

Неадекватный монтаж может привести к серьезным травмам и повреждению лампы.

日本語**注意！**

不適切な取り付けは人の傷害、およびランプの損傷の原因となる場合があります。

ITALIANO**ATTENZIONE!**


L'installazione non corretta pu causare lesioni alle persone e danni alla lampada.

BEFORE YOU BEGIN

1. Please read this manual thoroughly before use, and retain it for future reference.
2. Due to our continuous program of product development, data is subject to change without notice.
3. Unauthorized product tampering invalidates warranty & is a safety risk.
4. All electrical work must be carried out by qualified persons.
5. Always follow appropriate electrical codes. Connection devices with appropriate ratings and voltage must be used.
6. Disconnect mains power before product installation, connection, or disconnection.
7. Products are fixed luminaires for indoor use (i.e. Install out of reach / Only movable using tools).
8. LED-modules are non-replaceable light sources.
9. Do not use luminaires without LED Drivers (power units) connected (BX-, C-Series).
10. Connect LED drivers to electrical branch circuits (ensure suitable strain relief is fitted).
11. Products with an earth connection must be earthed for safety.
12. Installation of additional electrical circuit protection devices is strongly advised:
 - Type C MCB's (Miniature Circuit Breakers).
 - RCD (Residual Current Device).
 - ICL (Inrush Current Limiter).
 - SPD (Surge Protection Device).
13. Do not high voltage test.
14. Install LED drivers against a flat surface to ensure optimal heat dissipation and lifetime (BX-, C-Series).
15. Do not connect products installed on different mains phases to the same dimming device (dimnable products only).
16. Observe published product temperature specifications and limits.
17. Product surface temperature may become hot to the touch during use.
18. Do not stare directly at any bright light source.
19. As a precaution, use suitable eye protection if working for long periods under high intensity lighting.
20. Dispose of all waste in accordance with local regulations.
21. The external flexible cable of the luminaire is only replaceable by Valoya.
22. For luminaires supplied with open-end supply cables:
 - a. Cables should not be concealed or extended through parts of the building structure.
 - b. Cables should not be located above a suspended/dropped ceiling, or permanently fixed to the building structure.
 - c. Cables must be visible over their full length, not strained, and protected from physical damage.
 - d. Cables must be used within their electrical ratings at the maximum temperature of the installed environment.

IMPORTANT

Installation must be carried out by qualified persons, and according to the electrical safety rules & regulations applicable in your country!




RoHS


PATENTS APPLY

DELIVERY CHECK


- Please inspect the goods upon receipt to ensure that your delivery is complete.
- If you detect any damage to the packaging, please notify the carrier immediately and ask them to note that “the delivery was not delivered in good condition”.
- If the packaging shows no damage but the goods inside are either missing, defective, or show other signs of damage, please contact us.
- In all cases please take pictures as evidence and contact us as soon as possible by phone or e-mail.



Check package

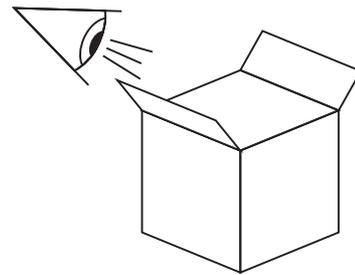

Check content


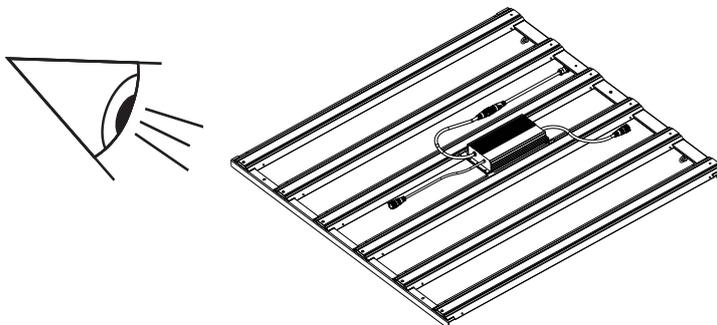


Check operation




If problems, contact us


PART IDENTIFICATION

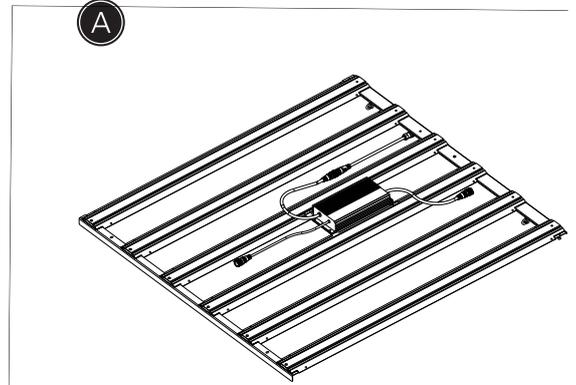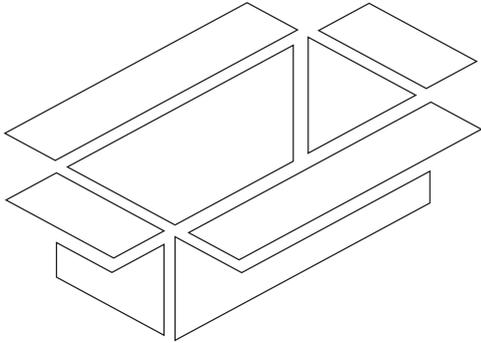


B

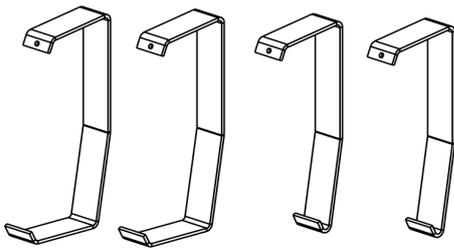


C



D

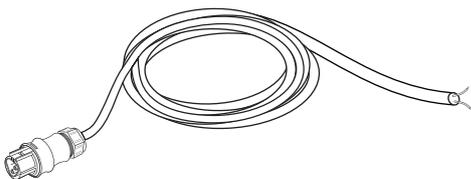

E

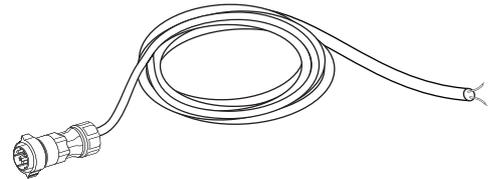

- A** Luminaire
- B** Standard hangers (x2)
- C** Optional hangers (x2) - ordered separately
- D** Mains input mating connector with 1.9 m (6') pigtail cable (field installable)
- E** Dimming mating connector with 1.9 m (6') pigtail cable (field installable)

SPECIFICATIONS (TYPICAL)

		RF600-6		RF700-6		
		Solray385	SolrayX	Solray 385	SolrayX	
Electrical & Physical	Luminaire & LED Driver	Spectrum	665	660	730	715
		Total Power incl. PSU (W)	665	660	730	715
		Input voltage (VAC)	220 - 480		220 - 480	
		Input current, @230V (A)	2,9		3,2	
		Power Factor	0,993		0,996	
		Frequency (Hz)	50/60		50/60	
		16A Type-C MCB load (max.)	12		12	
		Luminaire Insulation class	Class I: For Fixed Installations (protective earth required)		Class I: For Fixed Installations (protective earth required)	
		AC mains plug fitted	No		No	
		Dimmable	No		No	
Optical	Efficiency, 380-800nm (PPF) (µmol/J)	2.5	2.6	2.4	2.5	
	Photon Flux (PF); Full spectrum (µmol/s)	1670	1710	1780	1830	
	Photon Flux (PF); PAR (µmol/s)	1600	1700	1700	1800	
	Efficiency, PAR (PPF) (µmol/J)	2.4	2.5	2.3	2.5	
	Light intensity decay, Q90/L90 (hours)	36 000	50 000	36 000	50 000	
	Environmental	Luminaire only	Operational ambient temperature range (°C/°F) (°C/°F)	0...+40 / +32...+104		0...+40 / +32...+104
Max. allowed luminaire housing (tc) temperature (°C/°F)			75 / 167		75 / 167	
Maximum Relative Humidity (%)			90 (non-condensing)		90 (non-condensing)	
Storage temperature (°C/°F)			-20...+40 / -4...+104		-20...+40 / -4...+104	
Ingress Protection (IP) rating			IP65		IP65	
Insulation class			Class I: For Fixed Installations		Class I: For Fixed Installations	
Regulations & Approvals	CE marked	X				
	RoHS compliant	X				
	EMC directive compliant	X				
	Low Voltage Directive compliant	X				
	Eco-design (EuP) directive compliant	X				
	Certified to UL & CSA standards	X				
Packaging	Pieces per box (luminaire)	1				
	Box length (mm/in)	1170 / 46				
	Box width (mm/in)	90 / 3.5				
	Box height (mm/in)	1250 / 49				
	Box weight (kg/lb)	14 / 31				

Notes:



- Electrical values are typical nominal figures (variations may occur due to spectrum, component & production tolerances).
- Due to our continuous program of product development, specifications are subject to change without notice in order to improve spectra, function, performance & reliability.
- Due to manufacturing tolerances, slight variations are possible in cable lengths, weights & package dimensions.

PRODUCT DIMENSIONS

		RF600-6 & RF700-6
Luminaire	Length (mm/in)	1190 / 46.9
	Width (mm/in)	1130 / 44.5
	Height(without LED driver) (mm/in)	85 (45 /3.3 (1.8)
	Weight (kg/lb)	8.5 / 18.7
	AC input cable size (mm ² /AWG)	1.0 / 18
	AC input cable length (mm/in)	1.9 m
	Dimming cable length (mm/in)	1.9 m
LED Driver	Length (mm/in)	265 / 10.4
	Width (mm/in)	160 / 6.3
	Height (mm/in)	5.0 / 2.0
	Weight (Kg/lb)	2.7 / 6.0
	Minimum cable bending radius	5 x cable diameter
	Standard hanging system	Hangers for rack installation

PRODUCT DIMENSIONS

Left view		Right view	
DIM1	1125 mm 44.29 in	DIM1	136 mm 5.35 in
DIM2	1190 mm 46.85 in	DIM2	66 mm 2.59 in
DIM3	45 mm 1.77 in	DIM3	20 mm 0.78 in
DIM4	83 mm 3.27 in		
DIM5	812 mm 31.97 in		

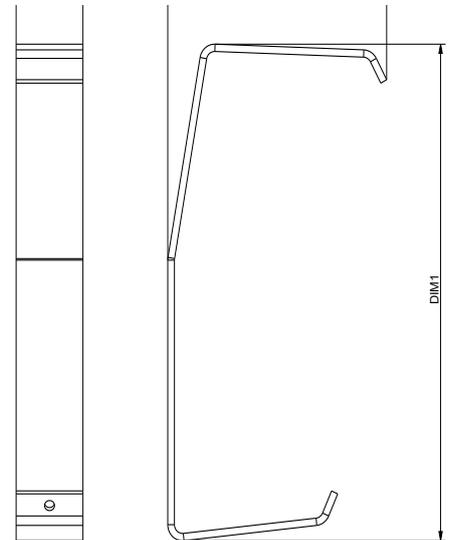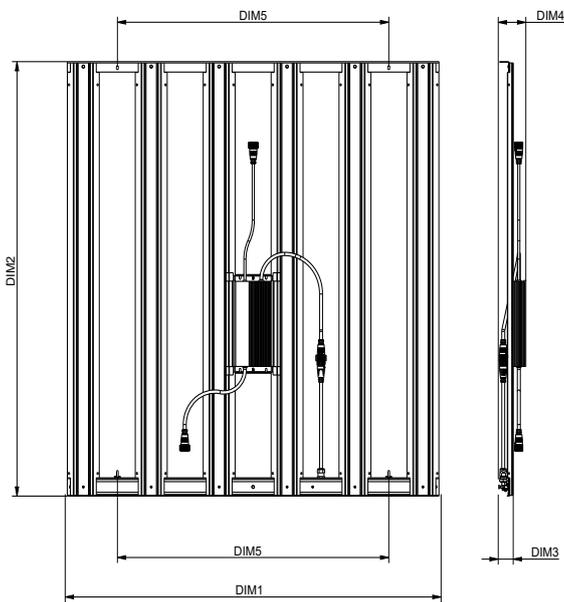

WARNINGS


RISK GROUP 1
NOTICE UV emitted from this product. Minimize exposure to eyes or skin. Use appropriate shielding.

These photobiological safety markings are based on testing of the light output characteristic of a single horticultural luminaire. Increased exposure risk of facility personnel may be present depending upon the number of horticultural luminaires and their placement and/or positioning within the plant growth facility.

It is the responsibility of the plant growth facility to address these risks at the facility level and to ensure that people entering the plant growth areas while the lights are on, are aware of these risks and that appropriate safeguards are in place.

LUMINAIRE ORIENTATION




No other orientation is permitted

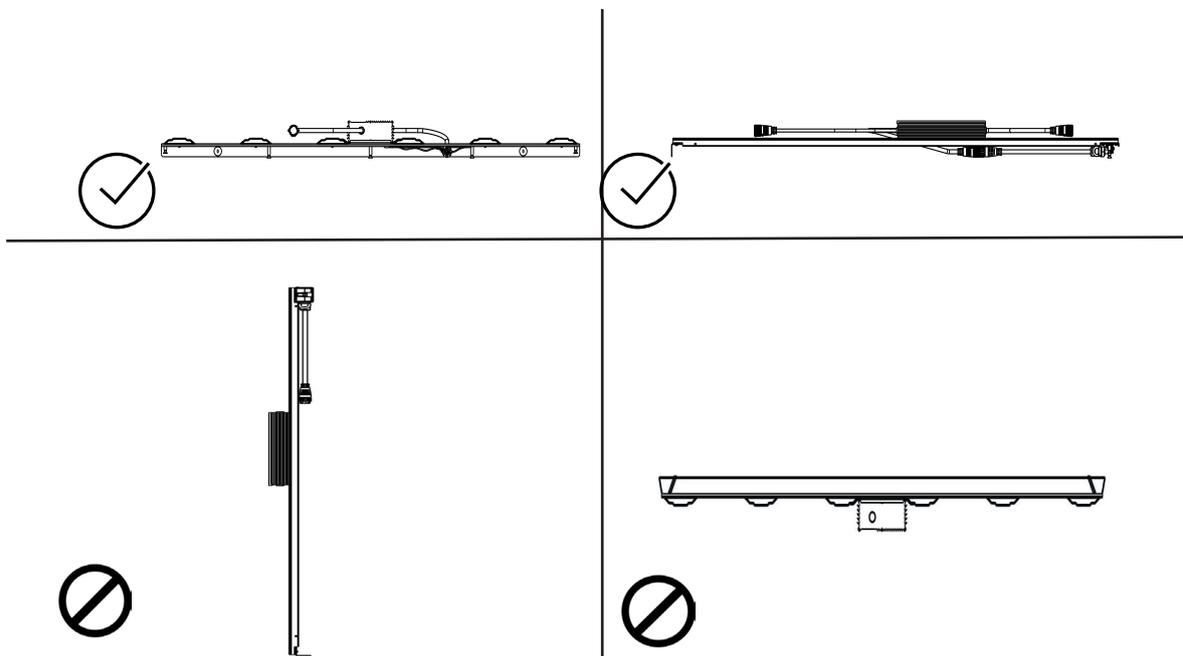

Notes:




- No other orientation permitted
- Not for intrac canopy use.
- Ensure the maximum specified operational ambient temperature around a luminaire is not exceeded by utilizing appropriate electrical or mechanical ventilation or cooling systems on the installation as necessary.
- IP rating valid in horizontal mounting position.

METHOD A (STANDARD HANGER)

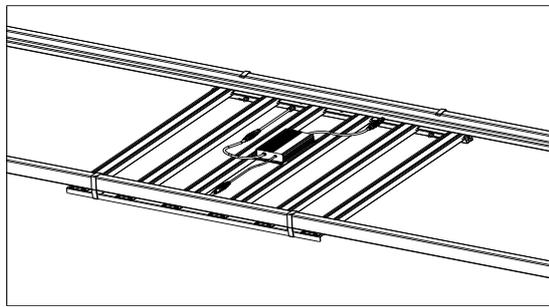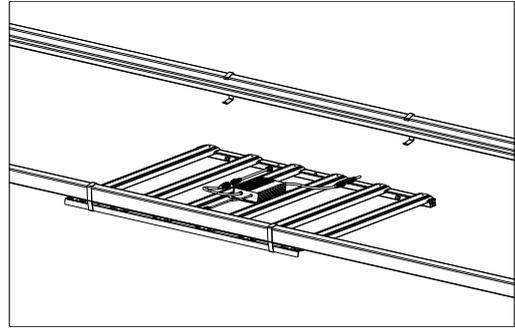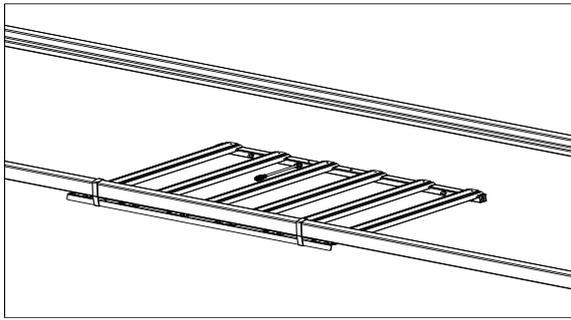

METHOD B (OPTIONAL HANGER)


Possible carabiner connection points

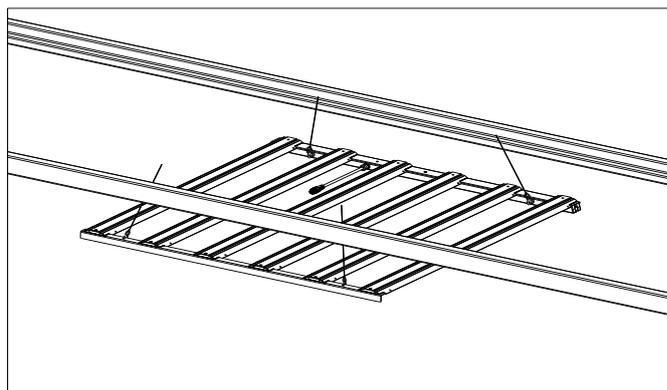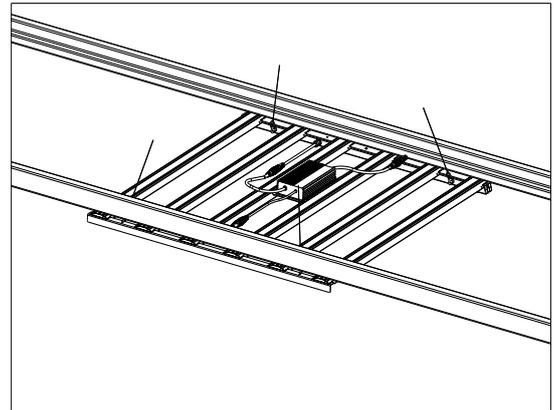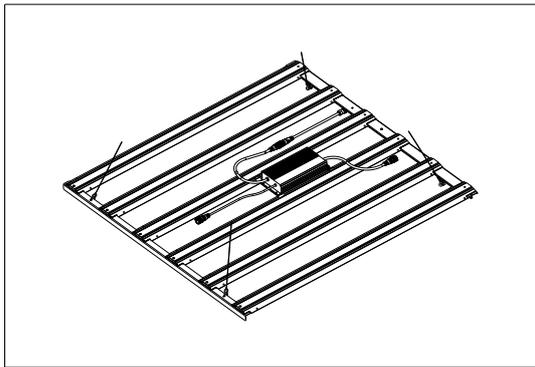

No other devices should be connected to the LED luminaire circuitry, e.g. HPS lights should not be connected together with LED lights to the same circuit.

LUMINAIRE CONNECTION

- 1) Connect the mating mains connector to the lamp.
- 2) Connect the dimming connector to the lamp.
- 3) If dimming is to be used, connect dimming lead's black wire to the "+" and white wire to "-" of a compatible current sink dimmer/controller.
- 4) Connect the mains cable to the mains supply.

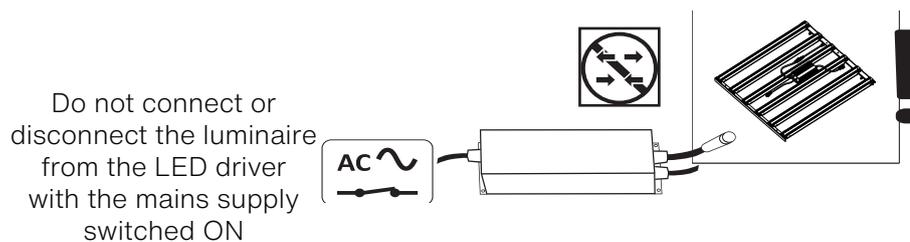


INRUSH CURRENT

This is the initial current surge drawn during product start-up. Total inrush current rises as the circuit load increases and is one factor that can contribute to nuisance tripping of circuit breakers (MCB's).

Practical performance will be affected by the MCB load, MCB tripping characteristics, site wiring impedance, and the angle of the AC mains cycle at the specific moment power is applied

Nuisance tripping issues may be improved by:

- Reducing the quantity of LED drivers connected to a single MCB.
- Re-distributing the load over multiple mains phases.
- Using an MCB with Type C (EN 60898) tripping characteristics.
- Installing additional inrush current limiting devices.
- Installing a zero crossing relay for powering up the LED drivers.

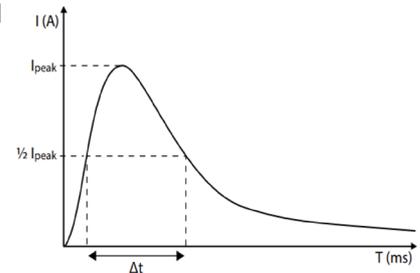


Example of a typical inrush current graph

MCBS (MINIATURE CIRCUIT BREAKERS)

Valoya only recommend using MCB's with "Type C" trip characteristics according to EN 60898.

The maximum quantity of Valoya products recommended for a 16A Type C MCB is stated on the product's technical specifications datasheet (e.g installation guide). This quantity is used as the 100% reference in the table below. The table is provided as a tool to enable calculation of the approximate maximum load for different MCB types and ratings. Installation wiring rating, impedances and mains switch-on angle variations may also influence the actual practical limit.

20A branch circuit is the maximum allowed per UL certification according to LED Drivers UL Conditions of Acceptability.

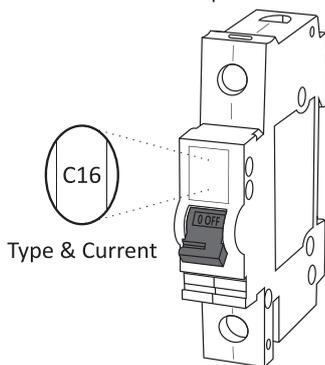


MCB example

MCB TYPE	Rating (A)	Relative quantity (%)
B	10	37
	16	60
	20	75

MCB TYPE	Rating (A)	Relative quantity (%)
C	10	62
	16	100 (Ref.)
	20	125

ICL (INRUSH CURRENT LIMITER)


An ICL can help avoid nuisance MCB tripping and can be installed between the MCB and the load. It also enables an increase the luminaire quantity up to the maximum RMS current limit of the Inrush Current Limiter.

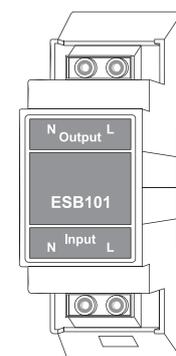

ICL example


RCDS (RESIDUAL CURRENT DEVICES)

An RCD is a protective safety device used to automatically disconnect the electrical supply when an imbalance is detected between live conductors. Requirements for use, and the needed RCD rating, will vary depending on the type of installation. Valoya luminaires are designed to be installed in fixed electrical installations where no plug is permitted for connecting the luminaire to the mains supply.




SURGE PROTECTORS

Valoya LED drivers have built-in surge protection. However, to protect against surge peaks above 4KV (e. g. Due to a lightning strike) we recommend the installation of transient voltage surge suppression.




3-PHASE SUPPLIES

- Do not apply power without the Neutral connected.
- Ensure the supply is off before disconnecting the Neutral.
- To avoid erratic dimming or possible product damage, do not connect the same dimmer or controller to luminaires supplied by different mains phases.



INSULATION RESISTANCE/ ELECTRIC STRENGTH TESTING



- Valoya products have been fully tested during manufacture. There is no need to test again.
- If the electrical site wiring must be tested, test with the luminaires and LED drivers disconnected from the mains supply.
- If luminaires and LED drivers are connected to the mains supply during the test, all Live phases and Neutral must be connected together before the test is carried out (Remember to check correct reconnection before reapplying the mains supply).

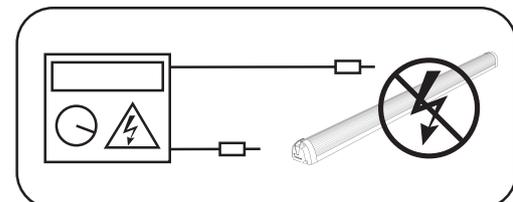

DIMMING METHODS


Differences in dimming methods exist depending on the LED driver (power unit) used by the Valoya luminaire.

- 1-10V: Minimum dimmed light output is approximately 10% (Spectra dependent). The mains supply to the driver must be switched in order to turn the light on & off.
- 0-10V: Minimum dimmed light output is approximately 6% (Spectra dependent). Below this the light output is off without the need for mains switching.

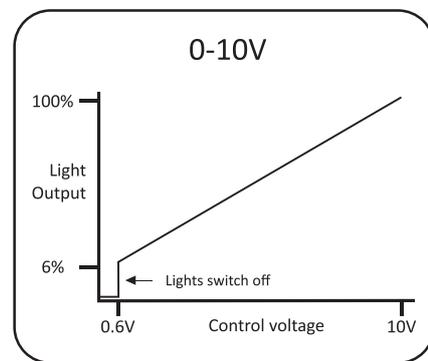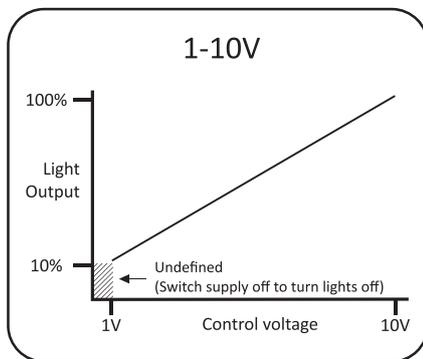

DIMMING CONTROL COMPATIBILITY

LED drivers used by Valoya comply with International standard for current sink controls; IEC 60929 Annex E. This specifies that the LED driver is a current source device. Compatible controls MUST be capable of sinking the current provided by the LED driver. Controls supplying a 10V signal ARE NOT compatible.

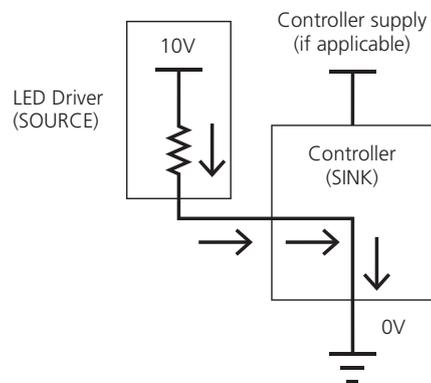

DIMMING POSSIBILITIES BY PRODUCT RANGE				
BX-Series	BL-Series	L-Series	C-Series	RX-Series
1-10V	-	-	0-10V	0-10V

DIMMING CONTROL COMPATIBILITY

Important considerations when choosing a controller

- Please check with you controller provider regarding the specification of the device.
- The number of luminaires possible to connect to a single control device will depend its specification, specifically:
 - The dimming method (1-10V or 0-10V).
 - The control circuit current sink capability.
 - Mains switch inrush current capacity.
- Dimming controls should only be connected to LED drivers on the same mains phase. Cross phase connection may lead to differing control circuitry electrical potentials, reduced dimming performance, or permanent damage to LED drivers

Due to variations in specifications, terminology and connections between different control device manufacturers, it is impossible to list all possible alternatives. The controller manufacturer will be able to verify that their product is a current sink device compatible with LED drivers designed according to IEC60929 Annex E.


Examples of manufacturers of compatible control products/systems (some example products indicated).

MANUFACTURERS	WEBSITE	EXAMPLE PRODUCT
ABB	www.abb.com	1-10 V 2112UJ-214-510
Argus	www.arguscontrols.com	P1A
Dinuy	www.dinuy.com	RE EL5 002
Ever Shining Optotech Co., Ltd	www.esop-power.com	EC011
Helvar	www.helvar.com	140 (TK4)
Honeywell Peha	www.peha.de	D 430
Jung	www.lutron.com	Electronic potentiometer, 1-10 V
Lutron	www.jung.de	
Osram	www.osram.com	Dim MCU 1-10V
Philips	www.lighting.philips.com	UID8600/00 1-10V Dimmer
Priva	www.priva.com	
RAM	www.ram-group.com	
Siemens	www.siemens.com	5TC8424

DIMMING CONNECTION EXAMPLES

Using a simple potentiometer (1-10V / 0-10V)


One LED driver can be connected to a standard 100KOhm potentiometer. Note that connection of multiple LED drivers to one 100KOhm potentiometer is not recommended due to possibilities for erratic dimming performance

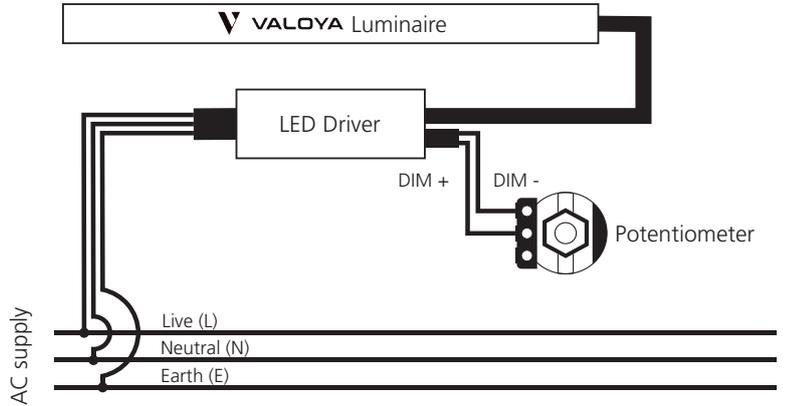

Using a compatible current sink 1-10V dimmer

Dimmer connections


- A - Live (output)
- B - Control (+)
- C - Control (-)
- D - Switched Live (Output)

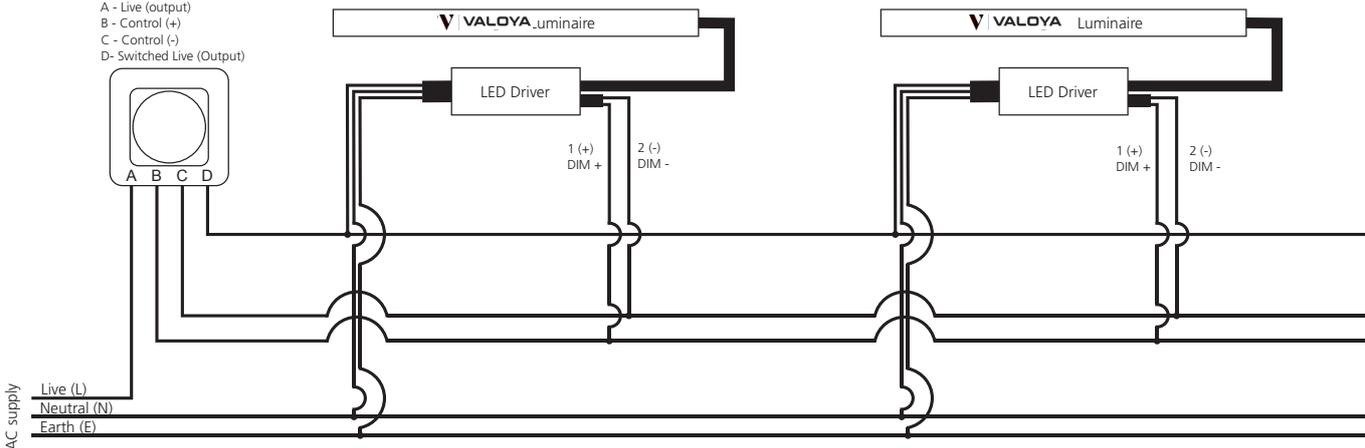

Using a compatible current sink 0-10V dimmer


Dimmer connections

- A - Live (Input)
- B - Control (+)
- C - Control (-)
- D - Switched Live (Output)

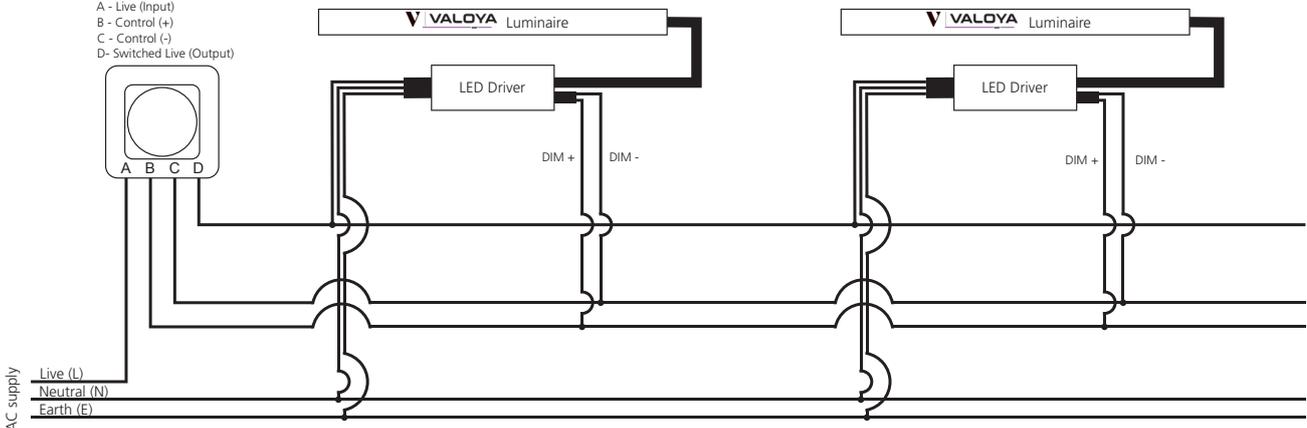


CLEANING

Switch the supply OFF



Allow to cool



Do not use detergent




Clean with a soft brush



Wipe with soft clothes



IP67 rated products.
Suitable for spray cleaning with
water or appropriate cleansing
solutions*



*Isopropyl alcohol (IPA) can be used for the cleaning of LEDs. If other cleansing solutions to be used, their appropriateness must be tested beforehand. Cleansing solutions with CFCs (chlorofluoro-carbons) should not be used.

NOTE: Power supply must be switched off and luminaire must be in an unpowered state when spray or wet cleaning is used.

BASIC FAULT FINDING

Lighting faults can be due to a rare product defect, connection error, or other external issue. Faults are unlikely to affect both luminaire and the LED driver (power unit) together. If possible, please check if the issue is luminaire or LED driver related. This will speed problem resolution and minimize unnecessary shipping costs.

- Switch off the mains supply.
- Disconnect the luminaire from its LED driver.
- Connect the luminaire to an unpowered, working LED driver (if available).
- Connect the mains supply to the working LED driver.
- If the problem remains, then the luminaire may be damaged.
- If the luminaire now works, then the original LED driver, or mains supply to it may be at fault.
- Note details of the problem (product type, quantity, problem description...) and contact Valoya for further assistance.

If a problem reoccurs or affects many products at the same time, please contact Valoya (www.valoya.com/support) for further advice and assistance.

WARRANTY

Products are covered by a limited warranty. Warranty starts from date of installation, but latest 3 months from the delivery date.

The warranty offered is “Return-to-Base”, meaning suspected faulty items shall be returned to Valoya for fault and warranty validation before any repair or replacement can be agreed.

Valoya warrants that each Product will be free from defects in material and workmanship for the duration of the warranty period as long as the products are installed and used in accordance with our published specifications and recommendations.

Warranty shall be void in the event any repairs or alterations not duly authorized by Valoya in writing are made to the Product by any person.

CLAIMS

Before returning a suspected faulty item, please contact Valoya (www.valoya.com/support) to give details of the issue and obtain a Return Material Authorization (RMA) reference number. Please be prepared to provide the following information about the issue:

- Product model information (e.g. B200 NS1).
- Product serial number plus YF or XF code.
- Quantity showing problems.
- Detailed problem description.
- Photograph or video showing the issue (if possible).
- Installation / invoice date (if known).

After receiving an RMA number, Products should be suitably packed and the package or shipping paperwork clearly marked with the RMA number. Returns received without an RMA reference number may be rejected.

Valoya will inspect the returned items to validate fault and warranty validity. If Valoya determines to its satisfaction that warranty is valid, Valoya will repair or replace the Product with one of similar age. Where a warranty claim is justified, Valoya will pay for the return freight expenses for repaired or replaced items. Valoya reserve the right to invoice for returning Products that are not found to be defective, or do not comply with the terms of this warranty, together with associated freight, testing and handling costs.

*** Above is a summary of our warranty and claim policy. For full details please see: www.valoya.com/warranty.**

Standards applied (where applicable):

EUROPE

EN60598-1: Luminaires. General requirements and tests.

EN60598-2-1: Luminaires. Part 2: Particular requirements. Section one – Fixed general purpose luminaires.

EN62031: LED modules for general lighting. Safety specifications.

EN 62493: Assessment of lighting equipment related to human exposure to electromagnetic fields.

EN55015: Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.

EN61547: Equipment for general lighting purposes. EMC immunity requirements.

EN61000-3-2: Electromagnetic compatibility - Limits - Limits for harmonic current emissions.

EN61000-3-3: Electromagnetic compatibility – Limits - Limits for Voltage Fluctuations and Flicker.

IEC EN 61000-4-2: Electromagnetic compatibility (EMC)- Part 4-2: Testing and measurement techniques - electrostatic discharge immunity test.

IEC EN 61000-4-3: Electromagnetic compatibility (EMC)- Part 4-3: Testing and measurement techniques - radiated, radio-frequency, electromagnetic field immunity test.

IEC EN 61000-4-4: Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test.

IEC EN 61000-4-5: Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test.

IEC EN 61000-4-6: Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to conducted disturbances, induced by radio-frequency fields.

IEC EN 61000-4-8: Electromagnetic compatibility (EMC) - Part 4-8: Testing and measurement techniques - Power frequency magnetic field immunity test.

IEC EN 61000-4-11: Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations immunity tests.

IEC 61347-2-13: Lamp controlgear. Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules.

IEC 61347-1: Lamp controlgear - Part 1: General and safety requirements.

IEC 62384: DC or AC supplied electronic control gear for LED modules. Performance requirements.

EN62471: Photobiological safety of lamps and lamp systems.

EN62560: Self-ballasted LED-lamps for general lighting services by voltage >50V - Safety specifications.

EN62776: Double-capped LED lamps designed to retrofit linear fluorescent lamps - Safety specifications.

NORTH AMERICA

UL1598: Luminare safety.

UL8750: Light Emitting Diode (LED) equipment for use in lighting products.

UL2108: Standard for Low Voltage Lighting Systems.

UL 8800: Standard for Horticultural Lighting Equipment

CSA C22.2 No.9.0: General Requirements for Luminaires.

CSA C22.2 No. 250.0: Luminaires

CSA C22.2 No. 250.13: Light Emitting Diode (LED) equipment for use in lighting products.

Contact:

Mekaanikonkatu 1
00880 Helsinki,
Finland

T +358 10 2350 300

E sales@valoya.com

W www.valoya.com

Distributor list can be found at:

www.valoya.com/contact

Valoya® is a registered trademark of Valoya Oy in the European Community, the USA and certain other countries.

Due to our continuous program of product development, data is subject to change without notice.